


# Nueva Generación ENSSA 2015( All In One Street Lamp Leds )

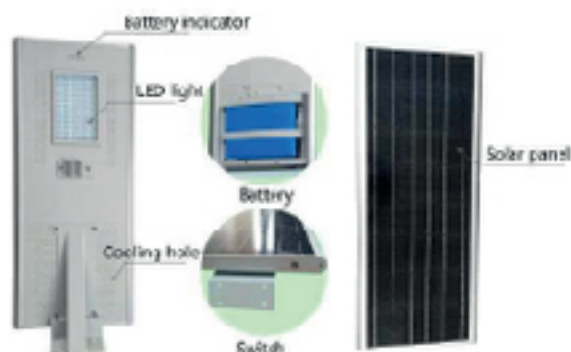

- Easy installation. No cable needed
- Lithium-ion LiFePO4
- High efficiency Mono solar panel
- Famous brand LED chip from EPSTAR and Bridgelux
- Mounted convenient, pole, wall, tree etc
- Modularity design. Easy assemble and maintenance
- Compact volume and light weight design saves freight cost and installation cost
- Rust-proof, dustproof and IP65 water proof Safety and reliability

CE  IP65

Model		NSP50 (no sensor)	NSP60 (no sensor)
LED Light	Max power	12V 53W	12V 60W
	Led chip	Bridgelux , USA	
	Lumen (LM)	6000-8600Lm	6000-8600Lm
	Life time	50,000hours	
Solar panel	Max power	18V/83W	18V/90W
	Solar cell	High efficiency, Mono	
	Life time	25years	
Battery	Capacity	39AH	42AH
	Type	Lithium-ion LiFePO4	
	Life time	5 years	
Charging	By sun	0-10 hours	
Lighting	discharge	10 hours	10 hours
Work temp	Range(°C)	-20°C~+60°C	
Colour temp	Range(k)	6500-7000k	
Height	Range (m)	7-8m	8-9m
Spacing	Range (m)	25-30m	25-30m
Work mode	Customized available	Full power +dimming	Full power +dimming
Material		Aluminum alloy	
Certificate		CE / ROHS / IP55	
Warranty		3years	
Packing & Weight	Product size(mm)	1080*450*153	1080*450*153
	Product weight	20kg	22.5 kg
	Carton size(mm)	1180*510*210	1180*510*210
	GW ,for carton	22.5kg	25kg
Packs Containers	20GP	230sets	230sets
	40GP	470sets	470sets